# NVENT ERICO GROUNDING BUS BARS STANDARD CONFIGURATIONS IN STOCK


## EGBA SERIES – 1/4" THICK

### Busbars
- 1/4" thick copper
- ASTM B187-C11000
- Electro-tin plating available (add "T" to part number)

### Brackets
- Type 304 stainless steel
- 1/8" thick


### Insulators (Stand Off)
- Manufactured from a halogen-free, fiberglass-reinforced thermalset unsaturated polyester molded compound (BMC)
- Meet the requirements of UL® 94 V-0 for self-extinguishing materials
- Indoor rating: 600 volts

### Fasteners
- 3/8" Type 304 stainless steel
- All bars shown include insulators, stainless steel brackets, stainless steel mounting bolts, and are UL Listed
- All illustrations show bars of 12" length Bars of longer lengths will have additional holes according to the pattern shown
- Contact nVent ERICO for additional ground bar configurations





PATTERN: "AA"

| | |
|---|---|
| EGBA14412AA | 4" x 12" |





PATTERN: "BB"

| | |
|---|---|
| EGBA14212BB | 2" x 12" |
| EGBA14412BB | 4" x 12" |





PATTERN: "CC"

| | |
|---|---|
| EGBA14412CC | 4" x 12" |
| EGBA14418CC | 4" x 18" |
| EGBA14420CC | 4" x 20" |
| EGBA14424CC | 4" x 24" |





PATTERN: "EE"

| | |
|---|---|
| EGBA14212EE | 2" x 12" |





PATTERN: "FF"

| | |
|---|---|
| EGBA14410FF | 4" x 10" |





PATTERN: "GG"

| | |
|---|---|
| EGBA14212GG | 2" x 12" |
| EGBA14412GG | 4" x 12" |
| EGBA14424GG | 4" x 24" |





PATTERN: "HH"

| | |
|---|---|
| EGBA14212HH | 2" x 12" |





PATTERN: "JJ"

| | |
|---|---|
| EGBA14215JJ | 2" x 15" |




PATTERN: "MM"

| | |
|---|---|
| EGBA14424MM | 4" x 24" |




PATTERN: "LL"

| | |
|---|---|
| EGBA14412LL | 4" x 12" |
| EGBA14424LL | 4" x 24" |

### nVent ERICO Copper Bars
- 1/4" C11000 Copper Bars
- Non UL Listed, ideal for field fabrication

| | |
|---|---|
| ECB14212 | 2" x 12" |
| ECB14224 | 2" x 24" |
| ECB14412 | 4" x 12" |
| ECB14424 | 4" x 24" |
| ECB142144 | 2" x 144" |
| ECB144144 | 4" x 144" |

Custom lengths available upon request

# TGB & TMGB SERIES – 1/4" THICK

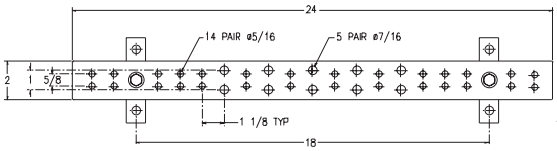
### Busbars
- 1/4" thick copper
- ASTM B187-C11000
- Electro-tin plating available (add "T" to part number)

### Brackets
- Type 304 stainless steel
- 1/8" thick

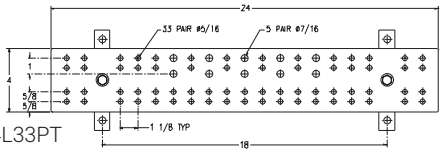
### Insulators (Stand Off)
- Manufactured from a halogen-free, fiberglass-reinforced thermalset unsaturated polyester molded compound (BMC)
- Meet the requirements of UL® 94 V-0 for self-extinguishing materials
- Indoor rating: 600 volts

### Fasteners
- 3/8" Type 304 stainless steel
- All bars shown include insulators, stainless steel brackets, stainless steel mounting bolts and are UL Listed
- All TGB and TMGB bars meet ASTM B187-C11000 Standard for copper, and ANSI/TIA/EIA-J-STD-607

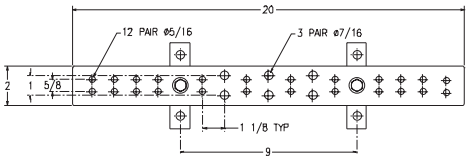
## COPPER AND ELECTRO-TIN PLATED BARS (*"T" AT END OF PART NUMBER DESIGNATES ELECTRO-TIN PLATED)



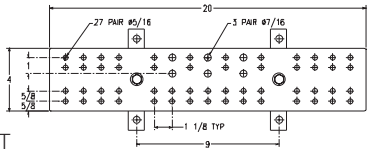

TGBA24L14P



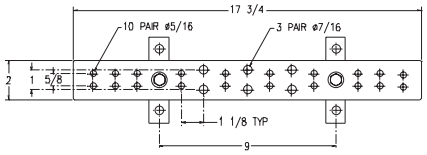

TMGBA24L33PT





TGBA20L12PT



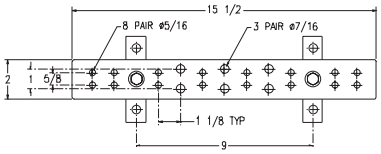

TMGBA20L27P
TMGBA20L27PT





TGBA18L10PT





TMGBA18L23PT





TGBA16L08P




TMGBA16L19PT





TGBA12L06P
TGBA12L06PT




TMGBA12L15P
TMGBA12L15PT

## TELECOM GROUNDING BUSBAR SPLICE KIT

### Features
- Use splice kits to connect telecom ground bars when ground bar extensions are required
- Includes two tinned copper splice plates and 1/4" stainless steel fasteners




Material: Copper | Finish: Tinned

| Part Number | For Use With | Height H | Width W | Thickness T | Hole Size HS |
|---|---|---|---|---|---|
| TGBSPLICEKIT | TGB Series | 2" | 3" | 1/4" | 11/32" |
| TMGBSPLICEKIT | TMGB Series | 4" | 3 1/2" | 1/4" | 11/32" |

nVent

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

©2019 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.
nVent reserves the right to change specifications without notice.